




CLEVELAND VIBRATOR GRID TOP VIBRATORY TABLES

MODEL GT

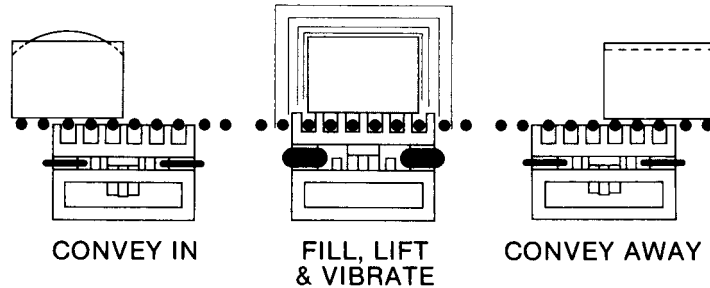

The Cleveland Vibrator Company GT, Grid Top Vibratory Table, is ideal for automatic and semi-automatic packaging and filling lines that use roller conveyor systems. The grid table is installed at the filling or vibrating station of an in-line conveyor system. The load to be vibrated is first rolled into position over the vibrating station, while the grid is in the lowered position. The air mounts inflate to elevate the grids through the roller section. The load is then ele-


vated and vibration is applied. After the vibration sequence, the grid lowers, and the load returns to the roller conveyor. The container is advanced, the next empty container is placed into position, and the operation is repeated. Deck sizes shown are standard. Custom sizes can be supplied to accommodate your exact needs. Contact our fabricated equipment sales department at **800-221-3298** for more information.

GT SERIES		GRID TOP VIBRATORY TABLES		
UNIT	DECK WIDTH	DECK LENGTH	DECK HEIGHT	NORMAL LOAD CAPACITY
GT-2326	23	26	20-1/2	300-1000 lbs.
GT-2338	23	38	20-1/2	300-1000 lbs.
GT-2950	29	50	22-1/2	300-4000 lbs.
GT-3550	35	50	22-1/2	1000-4000 lbs.
GT-4750	47	50	22-1/2	1000-4000 lbs.



All dimensions are in inches.

THE CLEVELAND VIBRATOR COMPANY
2828 CLINTON AVE. CLEVELAND, OH 44113
800-221-3298

CLEVELAND VIBRATOR GRID TOP VIBRATORY TABLES

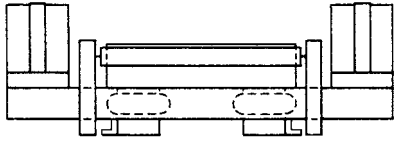

MODEL GT-O

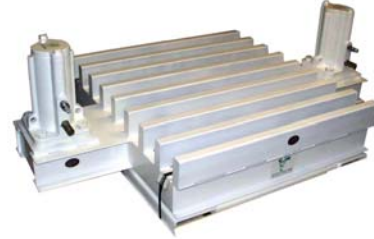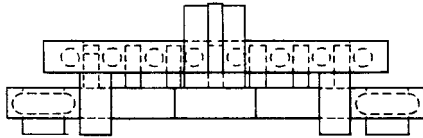

The Cleveland Vibrator Company GT-O is similar to the GT model, except that it is equipped with twin outboard mounted drives designed for applications with low height installation requirements. Five standard sizes are available with either air vibrators or electric powered vibrator drives. Consult factory for specifications on custom de-

signed units.

Deck sizes shown are standard. Custom sizes can be supplied to accommodate your exact needs. Contact our fabricated equipment sales department at **800-221-3298** for more information or fill out our [online quote form](#).

GT-O SERIES		LOW PROFILE GRID TOP VIBRATORY TABLES		
UNIT	DECK WIDTH	DECK LENGTH	DECK HEIGHT	NORMAL LOAD CAPACITY
GT-O-2326	23	26	13-1/2	500-1000 lbs.
GT-O-2338	23	38	13-1/2	500-1000 lbs.
GT-O-2950	29	50	15-1/2	1000-2000 lbs.
GT-O-3550	35	50	15-1/2	1000-2000 lbs.
GT-O-4750	47	50	15-1/2	1000-4000 lbs.

All dimensions are in inches

THE CLEVELAND VIBRATOR COMPANY
2828 CLINTON AVE. CLEVELAND, OH 44113
800-221-3298