

Miniature Air-Piston Vibrators



Proof That Big-Time Power Can Come in the Smallest Packages

They may be small, but they pack quite a punch. Our complete line of Miniature Air-Piston Vibrators features a compact design, high frequencies and low air consumption while still producing the high vibration intensity you need. Easy to install almost anywhere in your production line, they are ideal for automated parts track vibration, packaging/filling machines, and small bins and hoppers.




BENEFITS INCLUDE

- Designed and constructed for intermittent duty and maximum life
- Dual diameter piston allows for mounting at any angle
- One-piece, ductile iron housing, tight tolerance bore and spring-less design ensure long effective life
- Threaded exhaust port enables porting of exhaust air
- Mounting fasteners and push-fit hose connection included for quick setup
- VM-25 #304 stainless steel body ensures durability and extended life

Miniature Air-Piston Vibrators

Whether you work in the food and agriculture, pharmaceutical, medical, plastics manufacturing or other industry, you can count on our Miniature Air-Piston Vibrators to help keep your production process running smoothly.

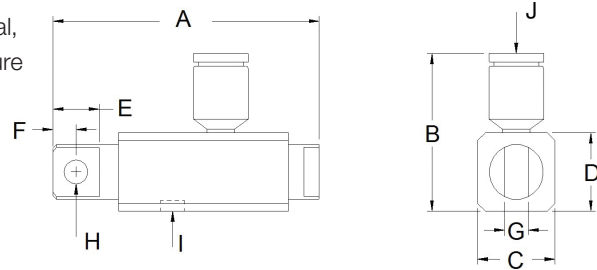

MODEL	A	B	C	D	E	F	G	H	I	J	WEIGHT	AIR CNSMP @ 80 PSI ; 5.4 BAR	FREQ. * @ 80 PSI ; 5.4 BAR	FORCE. @ 80 PSI ; 5.4 BAR
VM-25	2 3/16" 5.5 cm	1 5/16" 2.3 cm	5/8" 1.6 cm	5/8" 1.6 cm	3/8" 0.95 cm	3/16" 0.5 cm	3/16" 0.5 cm	3/16" 0.5 cm	#10-32 Tapped Exhaust	1/4" OD Push-On Fitting	0.20 lbs.	2 cfm 57 lpm	16,000 VPM	15 lbs. (66.6N)
VMAC-25	2 3/16" 5.5 cm	1 5/16" 2.3 cm	5/8" 1.6 cm	5/8" 1.6 cm	3/8" 0.95 cm	3/16" 0.5 cm	3/16" 0.5 cm	3/16" 0.5 cm	#10-32 Tapped Exhaust	1/4" OD Push-On Fitting	0.20 lbs.	2 cfm 57 lpm	14,000 VPM	12 lbs. (53.3N)
VM-25 with Muffler	2 3/16" 5.5 cm	1 5/16" 2.3 cm	5/8" 1.6 cm	5/8" 1.6 cm	3/8" 0.95 cm	3/16" 0.5 cm	3/16" 0.5 cm	3/16" 0.5 cm	#10-32 Tapped Exhaust	1/4" OD Push-On Fitting	0.20 lbs.	2 cfm 57 lpm	16,000 VPM	15 lbs. (66.6N)
VM-38	2 7/8" 7.3 cm	1 1/4" 3.2 cm	3/4" 1.9 cm	3/4" 1.9 cm	7/16" 1.1 cm	1/4" 0.6 cm	1/4" 0.6 cm	1/4" 0.6 cm	#10-32 Tapped Exhaust	1/4" OD Push-On Fitting	0.25 lbs.	2.1 cfm 60 lpm	11,400 VPM	21 lbs. (93.2N)
VM-38 with Muffler	2 7/8" 7.3 cm	1 1/4" 3.2 cm	3/4" 1.9 cm	3/4" 1.9 cm	7/16" 1.1 cm	1/4" 0.6 cm	1/4" 0.6 cm	1/4" 0.6 cm	#10-32 Tapped Exhaust	1/4" OD Push-On Fitting	0.25 lbs.	2.1 cfm 60 lpm	11,400 VPM	21 lbs. (93.2N)
VM-25 304 SS	2 3/16" 5.5 cm	1 5/16" 2.3 cm	5/8" 1.6 cm	5/8" 1.6 cm	3/8" 0.95 cm	3/16" 0.5 cm	3/16" 0.5 cm	3/16" 0.5 cm	#10-32 Tapped Exhaust	1/4" OD Push-On Fitting	0.20 lbs.	2 cfm 57 lpm	16,000 VPM	15 lbs. (66.6N)
VM-38 304 SS	2 7/8" 7.3 cm	1 1/4" 3.2 cm	3/4" 1.9 cm	3/4" 1.9 cm	7/16" 1.1 cm	1/4" 0.6 cm	1/4" 0.6 cm	1/4" 0.6 cm	#10-32 Tapped Exhaust	1/4" OD Push-On Fitting	0.25 lbs.	2.1 cfm 60 lpm	11,400 VPM	21 lbs. (93.2N)

FOR MORE INFORMATION

Call: Sales at 800-221-3298

Email: sales@clevelandvibrator.com

Buy Online: www.clevelandvibrator.com



ABOUT THE
CLEVELAND
VIBRATOR
COMPANY

The Cleveland Vibrator Company has been driving innovations in materials handling since 1923. From our corporate headquarters in Cleveland, Ohio, and in partnership with HK Technologies located in Salem, Ohio, we've met the challenges of more

than 15,000 customers all around the globe in a vast array of industries. Our comprehensive product line includes air-piston, rotary electric, electromagnetic, turbine and ball vibrators, as well as a wide variety of fabricated feeders, vibratory screeners,

ultrasonic screeners, vibratory conveyers and vibratory tables used for light, medium and heavy-duty industrial applications.